

PR150

Production of high-density dry ice pellets



Technical data

Dimensions mm/inch:

Length: 1300 / 51
Width: 700 / 27.5
Height: 1625 / 64
Height: 1845 / 73.6 (incl. ext. legs)

Weight:

kg: 700 / lbs: 1543

Rated Output:

kg/h: up to 120-200
lbs/h: up to 265-441
of high quality dry ice pellets, depending on the extruder plate applied

Pellet Size Diameter:

mm: 3 - 10 or 16
inch: 0.11 - 0.39 or 0.62

Inlet Liquid CO₂ Pressure:

bar: 16 - 22
psi: 232 - 319

Power Supply:

3 x 400 V AC + PE, 50/60 Hz,
Imax. 16 A

Rated Power: 4 kW



3 mm Pellets



10 mm Pellets



16 mm Pellets




ICETECH

Contact IceTech to obtain expert advice on the right pelletizer solution for you.

Head office Europe: +45 7656 1500 • Head office United States: +1 513-942-4144 • Logistics Center Germany: 08004 238 324
Head Office Asia: +65 6686-2159 • Or visit IceTech online at www.icetechworld.com to learn more.

PR150

Production of high-density dry ice pellets

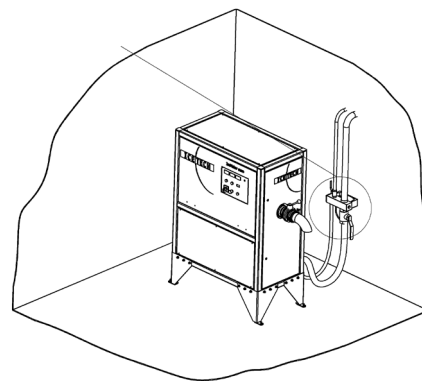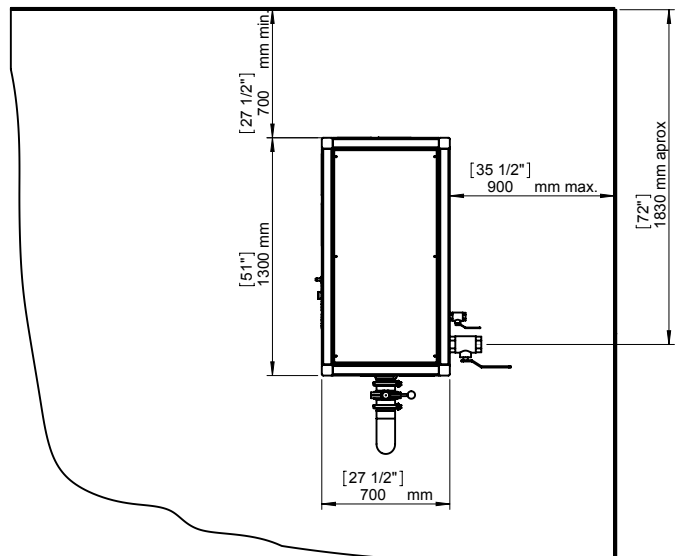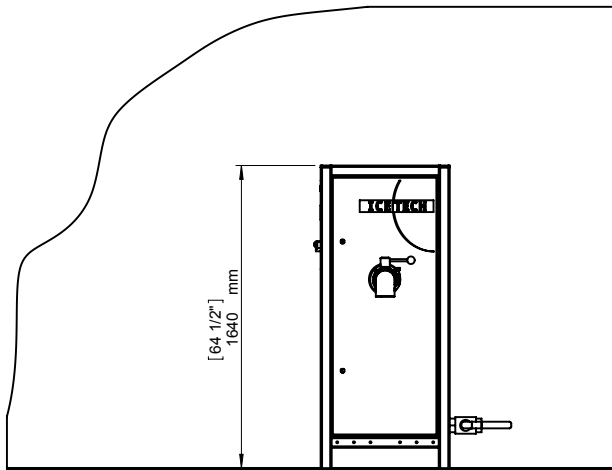

Floor Characteristics and Minimum Clear Distances

IceMaker PR150

- o The IceMaker must be placed on a horizontal concrete floor with an adequate load-carrying capacity, free from crack formation and suitable for bolting the IceMaker to it.
- o The minimum clear distances must be observed to provide sufficient space for opening the cabinet doors and servicing the IceMaker.

Installation of the IceMaker

The installation of the IceMaker must be carried out by one of IceTech's service technician, or by a technician approved by IceTech.